
# **Digital Precision Balance**





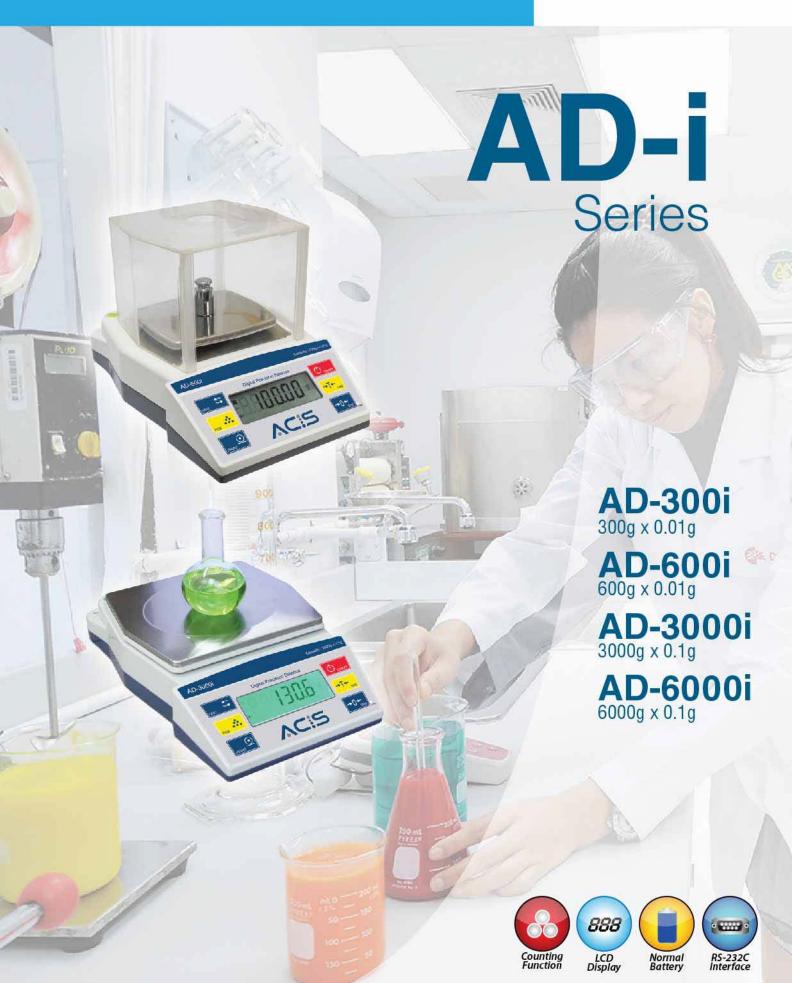

## Large Digital LCD Display with backlight

Easy to read weighing value, with 20 mm high LCD Display and automatic backlight

#### Large stainless steel weighing pan

Provide large space to put the weighing material with 170 x 190 mm weighing pan (AD-3000i and AD-6000i)

#### One touch calibration

Calibrate the scale with just one touch of calibration key

## Multiple weighing Unit

g, oz, lb, dwt, ozt, ct, tl.T, tl.H, tl.J, GN, dr, MM, ToLA, gsm, TAR and TMR weighing unit

## **Counting Function**

Count quantity of goods in a second

## Plastic Wind shield (AD-300i & AD-600i)

Eliminate wind and other environmental disturbance during weighing process

#### Standard RS-232 interface

Send data to PC or Printer is easy by RS-232 communication interface

## Ajustable foot and level bubble

Maintain scale platform in level position for accurate weighing

## Easy to operate and move


Power by 6 regular (AA) batteries or AC/DC 12 volt adapter

## Indonesian metrological directorate Approval

Approve to legally use in Indonesia by Indonesian trade ministry



#### Dimension

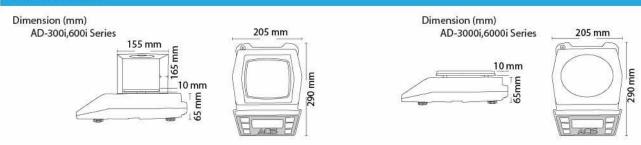

## **Specification**

Model Number	AD-300i	AD-600i	AD-3000i	AD-6000i
Capacity	300g	600g	3000g	6000g
Division	0.01g	0.01g	0.1g	0.1g
Pan Size	Ф 120 x 135mm		Ф 190 x 160mm	
Weighing Unit	g, oz ,lb ,dwt ,ozt ,ct ,tl. T, tl.H, tl.J, GN, dr, MM, ToLA, gsm, TAR & TMR			
Standard Accecories	AC/DC Adapter, Manual Book			
Net/Gross weight	2100 / 2800g			
Package	Standard Carton: 365 x 260 x 165(cm³)			
	4 units in one box:38 x 54 x34 (cm³)			
Operating Temperature	0-40°C (32-104°F)			
Power Source	6 x AA Size Batteries or AC/DC adapter			

Specifications are subject to change for improvement without prior notice



